

**MAX-8**



# MAX-8

Excellent Performances & Reliability

CPC(Q)D15/18/20/25/30/35T8

T8 series 1.5–3.5t forklift

EP EQUIPMENT CO.,LTD  
[www.ep-ep.com](http://www.ep-ep.com)

# CPC(Q)D15/18T8

## T8 series 1.5-1.8t forklift specification

General		CPC(Q)D15T8				CPC(Q)D18T8			
1	Manufacturer	CPCD15T8-NE92	CPCD15T8-S4Q	CPCD15T8-F20	CPCD15T8-K21	CPCD18T8-NE92	CPCD18T8-S4Q	CPCD18T8-F20	CPCD18T8-K21
2	Model								
3	Power type	Diesel	Diesel	Gasoline	Gasoline	Diesel	Diesel	Gasoline	Gasoline
4	Rated capacity	1500	1500	1500	1500	1500	1800	1500	1500
5	Load center	500	500	500	500	500	500	500	500
6	Lift height	3000	3000	3000	3000	3000	3000	3000	3000
7	Free lift height	120	120	120	120	120	120	120	120
8	Fork size	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35
9	Mast tilt range	L×W×T	F/S						
10	Fork overhang(wheel center to fork face)	612	612	612	612	612	612	612	612
11	Rear overhang	420	420	420	420	420	420	420	420
12	Length to face of fork	420	420	420	420	420	420	420	420
13	Overall width	2230	2230	2230	2230	2270	2230	2270	2230
14	Mast lowered height	1080	1080	1080	1080	1080	1080	1080	1080
15	Mast extended height	1995	1995	1995	1995	1995	1995	1995	1995
16	Overhead guard height	3960	3960	3960	3960	3960	3960	3960	3960
17	Turning radius(outside)	2070	2070	2070	2070	2070	2070	2070	2070
18	Min.right angle stacking aisle width (Add load length and clearance )	1995	1995	1995	1995	2035	1995	2035	1995
19	Travel (No load)	2400	2400	2400	2400	2440	2400	2440	2400
20	Speed	14	14	14	14	14	14	14	14
21	Lifting (Full load)	460	460	460	460	460	460	460	460
22	Lowering (Full load)	450	450	450	450	450	450	450	450
23	Max.Drawbar Pull (Full load)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)
24	Max.Gradeability (Full load)	20	20	20	20	20	20	20	20
25	Tyres	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
26	Front	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR
27	Rear	920	920	920	920	920	920	920	920
28	Wheelbase	920	920	920	920	920	920	920	920
29	Ground clearance	1430	1430	1430	1430	1430	1430	1430	1430
30	Wheelbase center	110	110	110	110	110	110	110	110
31	Self weight	145	145	145	145	145	145	145	145
32	Full load	3570	3570	3570	3570	3995	3570	3995	3570
33	Rear	630	630	630	630	705	630	705	630
34	No load	1215	1215	1215	1215	1305	1215	1305	1215
35	Rear	1485	1485	1485	1485	1595	1485	1595	1485
36	Voltage/Capacity(20HR)	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60
37	Modal	4TNE92	SAQ2	FE(2.0L)	K21	4TNE92	SAQ2	FE(2.0L)	K21
38	Manufacture	YANMAR	Mitsubishi	Mazda	Nissan	YANMAR	Mitsubishi	Mazda	Nissan
39	Rated output/r.p.m	33/2450	32.9/2500	37.2/2700	31.2/2250	33/2450	32.9/2500	37.2/2700	31.2/2250
40	Rated torque/r.p.m	136/1600	135/2000	142/1800	143.7/1600	136/1600	135/2000	142/1800	143.7/1600
41	No.of cylinder	4	4	4	4	4	4	4	4
42	Bore×Stroke	88×100	88×103	86×94	89×83	92×100	88×103	86×94	89×83
43	Displacement	2659	2505	2184	2085	2659	2505	2184	2085
44	Fuel tank capacity	50	50	50	50	50	50	50	50
45	Manufacture	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
46	Type	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
47	Stage	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)
48	Operating pressure	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1. Special lifting height available ( 2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m, Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m )  
 2. Attachment available.  
 3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

# CPC(Q)D20/25T8

## T8 series 2.0-2.5t forklift specification

General		CPC(Q)D20T8				CPC(Q)D25T8																																											
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48		
Manufacturer		CPC(Q)D20T8				CPC(Q)D25T8				CPC(Q)D20T8-F20				CPC(Q)D25T8-F20				CPC(Q)D20T8-K21				CPC(Q)D25T8-K21				CPC(Q)D20T8-491				CPC(Q)D25T8-491																			
Model		CPCD20T8				CPCD25T8				CPCD20T8-F20				CPCD25T8-F20				CPCD20T8-K21				CPCD25T8-K21				CPCD20T8-491				CPCD25T8-491																			
Power type		Diesel				Diesel				Gasoline				Gasoline				Gasoline				Gasoline				Gasoline				Gasoline																			
Rated capacity		2000				2000				2000				2000				2500				2500				2500				2500																			
Load center		500				500				500				500				500				500				500				500																			
Lift height		3000				3000				3000				3000				3000				3000				3000				3000																			
Free lift height		120				120				120				120				120				120				120				120																			
Fork size		1070×120×40				1070×120×40				1070×120×40				1070×120×40				1070×120×40				1070×120×40				1070×120×40				1070×120×40																			
Mast tilt range		61/2				61/2				61/2				61/2				61/2				61/2				61/2				61/2																			
Fork overhang(wheel center to fork face)		476				476				476				476				476				476				476				476																			
Rear overhang		485				485				485				485				485				485				485				485																			
Length to face of fork		2610				2610				2610				2610				2610				2610				2610				2610																			
Overall width		1150				1150				1150				1150				1150				1150				1150				1150																			
Mast lowered height		1995				1995				1995				1995				1995				1995				1995				1995																			
Mast extended height		4200				4200				4200				4200				4200				4200				4200				4200																			
Overhead guard height		2130				2130				2130				2130				2130				2130				2130				2130																			
Turning radius(outside)		2170				2170				2170				2170				2170				2170				2170				2170																			
Min,right angle stacking aisle width (Add load length and clearance )		2680				2680				2680				2680				2680				2680				2680				2680																			
Travel (No load)		20				20				20				20				20				20				20				20																			
Lifting (Full load)		450				450				450				450				450				450				450				450																			
Lowering (Full load)		450				450				450				450				450				450				450				450																			
Max.Drawbar Pull (Full load)		17500				17500				17500				17500				17500				17500				17500				17500																			
Max.Graadesability (Full load)		20				20				20				20				20				20				20				20																			
Tyres		7.00-12-12PR				7.00-12-12PR				7.00-12-12PR				7.00-12-12PR				7.00-12-12PR				7.00-12-12PR				7.00-12-12PR				7.00-12-12PR																			
Tread		970				970				970				970				970				970				970				970																			
Wheelbase		1600				1600				1600				1600				1600				1600				1600				1600																			
Ground clearance		120				120				120				120				120				120				120				120																			
Weight		3580				3580				3580				3580				3580				3580				3580				3580																			
Full load		4856				4856				4856				4856				4856				4856				4856				4856																			
Distribution		724				724				724				724				724				724				724				724																			
No load		1428				1428				1428				1428				1428				1428				1428				1428																			
Voltage/Capacity(20HR)		12/60				12/60				12/60				12/60				12/60				12/60				12/60				12/60																			
Model		SAS-DPC				C490BFG-25				A498BT1-39				FE(2.0L)				S45-DPC				C490BFG-25				A498BT1-39				FE(2.0L)																			
Manufacture		Mitsubishi				CHINA				Mitsubishi				Mitsubishi				CHINA				Mitsubishi				CHINA				Mitsubishi																			
Rated output/r.p.m		34.4/2250				36.8/2400				31.2/2250				37.2/2700				34.4/2250				36.8/2400				31.2/2250				37.2/2700																			
Rated torque/r.p.m		165/1700				156/1500				143.7/1600				142/1800				165/1700				156/1500				143.7/1600				142/1800																			
No.of cylinder		4				4				4				4				4				4				4				4																			
Bore×Stroke		94×120				90×105				98×105				86×94				94×120				98×105				86×94				91×86																			
Displacement		3331				2670				3168				2184				2065				3331				2670				3168																			
Fuel tank capacity		60				60				60				60				60				60				60				60																			
Manufacture		CHINA				CHINA				CHINA				CHINA				CHINA				CHINA				CHINA				CHINA																			
Type		FWD/RSV				FWD/RSV				FWD/RSV				FWD/RSV				FWD/RSV				FWD/RSV				FWD/RSV				FWD/RSV																			
Stage		1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)																			
Operating pressure		17.5				17.5				17.5				17.5				17.5				17.5				17.5				17.5																			
For attachments																																																	
Special lifting height available ( 2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m )																																																	
The parameters in the table are of the standard model. For more information, please contact us.																																																	
4. Specification are subject to change without notice.																																																	
2. Attachment available.																																																	

# CPC(Q)D30/35T8

## T8 series 3.0-3.5t forklift specification

General		CPC(Q)D30T8				CPC(Q)D35T8																																									
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Manufacture		CPCD30T8-S4S				CPCD30T8-F20				CPCD30T8-S4S				CPCD35T8-S4S				CPCD35T8-K25				CPCD35T8-K25				CPCD35T8-491																					
Model		Diesel				Gasoline				Diesel				Gasoline				Diesel				Gasoline				Gasoline																					
Power type		3000				3000				3000				3000				3500				3500				3500																					
Rated capacity		500				500				500				500				500				500				500																					
Load center		3000				3000				3000				3000				3000				3000				3000																					
Lift height		120				120				120				120				120				120				120																					
Free lift height		1070×125×45				1070×125×45				1070×125×45				1070×125×45				1070×125×45				1070×125×45				1070×125×50																					
Fork size		L×W×T				L×W×T				L×W×T				L×W×T				L×W×T				L×W×T																									
Mast tilt range		F/S				F/S				F/S				F/S				F/S				F/S																									
Fork overhang(wheel center to fork face)		481				481				481				486				486				486																									
Rear overhang		2762				2762				2762				2822				2822				2822																									
Length to face of fork		1200				1200				1200				1200				1200				1200																									
Overall width		2005				2005				2005				2005				2005				2005																									
Mast lowered height		4210				4210				4210				4210				4210				4210																									
Mast extended height		2180				2180				2180				2180				2180				2180																									
Overhead guard height		2450				2450				2450				2450				2450				2450																									
Turning radius(outside)		2950				2950				2950				2950				2950				2950																									
Min.right angle stacking aisle width (Add load length and clearance)		20				20				20				20				20				20																									
Travel (No load)		20				20				20				20				20				20																									
Speed		400				400				400				400				400				400																									
Lifting (Full load)		400				400				400				400				400				400																									
Lowering (Full load)		400				400				400				400				400				400																									
Max.Drawbar Pull (Full load)		21000				21000				21000				21000				21000				21000																									
Max.Gradeability (Full load)		20				20				20				20				20				20																									
Types		Front				28×9-15-12PR				28×9-15-12PR				28×9-15-12PR				28×9-15-12PR				28×9-15-12PR																									
		Rear				6.50-10-10PR				6.50-10-10PR				6.50-10-10PR				6.50-10-10PR				6.50-10-10PR																									
Tread		1010				1010				1010				1010				1010				1010																									
Wheelbase		1700				1700				1700				1700				1700				1700																									
Lowest		140				140				140				140				140				140																									
Wheelbase center		175				175				175				175				175				175																									
Self weight		6488				6488				6488				6488				6488				6488																									
Full load		962				962				962				962				962				962																									
No load		1810				1810				1810				1810				1810				1810																									
Voltage/Capacity(20HR)		12/60				12/60				12/60				12/60				12/60				12/60																									
Modal		S4S-DPC				C490BPG-25				A498BT1-39				K25				FE(2.0L)				S4S-DPC																									
Manufacture		China				China				China				China				China				China																									
Rated output/r.p.m		36.8/2650				36.8/2650				36.8/2650				36.8/2650				36.8/2650				36.8/2650																									
Rated torque/r.p.m		165/1700				155/1500				165/1700				176.5/1600				165/1600				165/1600																									
No.of cylinder		4				4				4				4				4				4																									
Bore×Stroke		94×120				90×105				98×105				89×100				89×105				89×105																									
Displacement		3331				2670				3168				2488				3331				3168																									
Fuel tank capacity		70				70				70				70				70				70																									
Manufacture		China				China				China				China				China				China																									
Type		Powershift				Powershift				Powershift				Powershift				Powershift				Powershift																									
Stage		1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)																									
Operating pressure		17.5				17.5				17.5				17.5				17.5				17.5																									
For attachments																																															
Weight		Front				6488				6488				6488				6488				6488				6488																					
		Rear				962				962				962				962				962				962																					
Distribution		Front				1810				1810				1810				1810				1810				1810																					
		Rear				2640				2640				2640				2640				2640				2640																					
Battery		Voltage/Capacity(20HR)				12/60				12/60				12/60				12/60				12/60				12/60																					
		Modal				S4S-DPC				C490BPG-25				A498BT1-39				K25				FE(2.0L)				S4S-DPC																					
		Manufacture				China				China				China				China				China				China																					
		Rated output/r.p.m				36.8/2650				36.8/2650				36.8/2650				36.8/2650				36.8/2650				36.8/2650																					
		Rated torque/r.p.m				165/1700				155/1500				165/1700				176.5/1600				165/1600				165/1600																					
		No.of cylinder				4				4				4				4				4				4																					
		Bore×Stroke				94×120				90×105				98×105				89×100				89×105				89×105																					
		Displacement				3331				2670				3168				2488				3331				3168																					
		Fuel tank capacity				70				70				70				70				70				70																					
		Manufacture				China				China				China				China				China				China																					
		Type				Powershift				Powershift				Powershift				Powershift				Powershift				Powershift																					
		Stage				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)				1/1(2/2)																					
		Operating pressure				17.5				17.5				17.5				17.5				17.5				17.5																					
		For attachments																																													

1. Special lifting height available ( 2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m )

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

2. Attachment available.

**1.5~1.8t T8 series mast: (pneumatic)**

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	1.5t	1.8t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												1.5t	1.8t	kg	kg	kg
Wide view mast	2W200	2000	1495	2585	2955	120	120	420	420	6	12	1500	1800	1500	1800	
	2W250	2500	1745	3085	3455	120	120	420	420	6	12	1500	1800	1500	1800	
	2W270	2700	1845	3285	3655	120	120	420	420	6	12	1500	1800	1500	1800	
	2W300	3000	1995	3585	3955	120	120	420	420	6	12	1500	1800	1500	1800	
	2W330	3300	2145	3885	4255	120	120	420	420	6	12	1500	1800	1500	1800	
	2W350	3500	2245	4085	4455	120	120	420	420	6	12	1500	1800	1500	1800	
	2W360	3600	2295	4185	4555	120	120	420	420	6	12	1500	1800	1500	1800	
	2W400	4000	2545	4585	4955	120	120	420	420	6	12	1400	1700	1500	1800	
	2W430	4300	2695	4885	5255	120	120	420	420	6	6	1300	1600	1400	1700	
	2W450	4500	2795	5085	5455	120	120	420	420	6	6	1250	1500	1350	1600	
wide view full 2-stage mast	2F250	2500	1790	3105	3455	1045	765	420	420	6	12	1500	1800	1500	1800	
	2F270	2700	1890	3305	3655	1145	865	420	420	6	12	1500	1800	1500	1800	
	2F300	3000	2040	3605	3955	1345	1105	420	420	6	12	1500	1800	1500	1800	
	2F330	3300	2190	3905	4255	1495	1165	420	420	6	12	1500	1800	1500	1800	
	2F360	3600	2340	4205	4555	1645	1315	420	420	6	12	1500	1800	1500	1800	
	2F400	4000	2540	4605	4955	1815	1565	420	420	6	12	1400	1700	1500	1800	
wide view full 3-stage mast	3F430	4300	1965	5070	5255	1425	1080	440	440	6	6	1250	1500	1350	1600	
	3F450	4500	2045	5130	5465	1485	1140	440	440	6	6	1200	1400	1300	1500	
	3F480	4800	2160	5445	5755	1575	1230	440	440	6	6	1100	1300	1200	1400	
	3F500	5000	2210	5605	5955	1665	1320	440	440	6	6	1050	1200	1150	1300	
	3F550	5500	2375	6120	6455	1825	1480	440	440	3	6	/	/	950	1100	
	3F600	6000	2600	6695	6955	1975	1630	440	440	3	6	/	/	750	900	

Note:1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

**2.0~2.5t T8 series mast: (pneumatic)**

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	2.0t	2.5t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												2.0t	2.5t	kg	kg	kg
Wide view mast	2W200	2000	1585	2740	3420	120	120	476	476	6	12	2000	2500	2000	2500	
	2W250	2500	1725	3040	3720	120	120	476	476	6	12	2000	2500	2000	2500	
	2W270	2700	1825	3240	3920	120	120	476	476	6	12	2000	2500	2000	2500	
	2W300	3000	1995	3540	4220	120	120	476	476	6	12	2000	2500	2000	2500	
	2W330	3300	2145	3890	4370	120	120	476	476	6	12	2000	2500	2000	2500	
	2W350	3500	2245	3890	4570	120	120	476	476	6	12	2000	2500	2000	2500	
	2W360	3600	2295	3990	4670	120	120	476	476	6	12	2000	2500	2000	2500	
	2W400	4000	2545	4040	4720	120	120	476	476	6	12	1900	2300	2000	2500	
	2W430	4300	2695	4340	5020	120	120	476	476	6	6	1800	2100	1950	2450	
	2W450	4500	2795	4290	4970	120	120	476	476	6	6	1700	2000	1900	2400	
wide view full 2-stage mast	2F250	2500	1780	2090	2770	1210	560	476	476	6	12	2000	2500	2000	2500	
	2F270	2700	1880	2290	2970	1310	660	476	476	6	12	2000	2500	2000	2500	
	2F300	3000	2030	2590	3270	1460	810	476	476	6	12	2000	2500	2000	2500	
	2F330	3300	2180	3840	4520	1610	960	476	476	6	12	2000	2500	2000	2500	
	2F360	3600	2330	4140	4820	1760	1110	476	476	6	12	2000	2500	2000	2500	
	2F400	4000	2580	4540	5220	2060	1410	476	476	6	12	1900	2300	2000	2500	
wide view full 3-stage mast	3F430	4300	2030	4240	4880	1360	730	490	490	6	6	1700	2000	1900	2400	
	3F450	4500	2110	5720	5040	1460	810	490	490	6	6	1600	1900	1800	2300	
	3F480	4800	2215	6020	5345	1565	915	490	490	6	6	1500	1700	1700	2100	
	3F500	5000	2300	6220	5540	1610	960	490	490	6	6	1400	1600	1600	2000	
	3F550	5500	2550	6800	6120	1770	1120	490	490	3	6	1050	1200	1500	1800	
	3F600	6000	2800	7220	6540	2020	1370	490	490	3	6	700	800	1400	1600	


Note:1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

**3.0~3.5t T8 series mast: (pneumatic)**


Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	3.0t	3.5t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												3.0t	3.5t	kg	kg	kg
Wide view mast	2W200	2000	1510	2570	3250	120	120	481	486	6	12	3000	3000	3500	3500	
	2W250	2500	1760	3070	3750	120	120	481	486	6	12	3000	3000	3500	3500	
	2W270	2700	1860	3270	3950	120	120	481	486	6	12	3000	3000	3500	3500	
	2W300	3000	2010	3570	4250	120	120	481	486	6	12	3000	3000	3500	3500	
	2W330	3300	2160	3690	4370	120	120	481	486	6	12	3000	3000	3500	3500	
	2W350	3500	2260	3890	4570	120	120	481	486	6	12	3000	3000	3500	3500	
	2W360	3600	2310	3990	4670	120	120	481	486	6	12	3000	3000	3500	3500	
	2W400	4000	2560	4040	4720	120	120	481	486	6	12	2850	3000	3250	3500	
	2W430	4300	2710	4340	5020	120	120	481	486	6	6	2700	2900	3000	3400	
	2W450	4500	2810	4290	4970	120	120	481	486	6	6	2550	2850	2850	3350	
wide view full 2-stage mast	2F250	2500	1795	2220	2900	1210	560	481	486	6	12	3000	3000	3500	3500	
	2F270	2700	1895	2320	3000	1310	660	481	486	6	12	3000	3000	3500	3500	
	2F300	3000	2045	2620	3300	1460	810	481	486	6	12	3000	3000	3500	3500	
	2F330	3300	2195	3870	4550	1610	960	481	486	6	12	3000	3000	3500	3500	
	2F360	3600	2345	4020	4700	1760	1110	481	486	6	12	3000	3000	3500	3500	
	2F400	4000	2595	4420	5100	2060	1410	481	486	6	12	2850	3000	3250	3500	
wide view full 3-stage mast	3F430	4300	2045	5570	4910	1360	730	495	500	6	6	2550	2850	2850	3350	
	3F450	4500	2125	5750	5070	1460	810	495	500	6	6	2400	2700	2700	3200	
	3F480	4800	2230	6050	5375	1565	915	495	500	6	6	2250	2550	2450	2950	
	3F500	5000	2315	6250	5570	1610	960	495	500	6	6	1650	2250	2300	2800	
	3F550	5500	2565	6830	6150	1770	1120	495	500	3	6	1800	2250	1800	2550	
	3F600	6000	2815	7250	6570	2020	1370	495	500	3	6	1200	2100	1300	2300	

Note:1. With sideshifter minus 200Kg, with integral sideshifter minus 150Kg.


RATED CAPACITIES AND LOAD CENTERS GRAPH

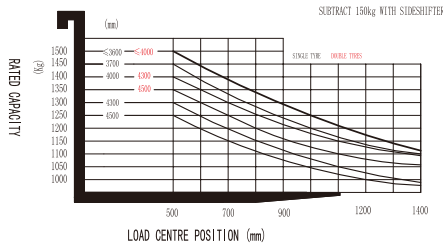


RATED CAPACITIES AND LOAD CENTERS GRAPH

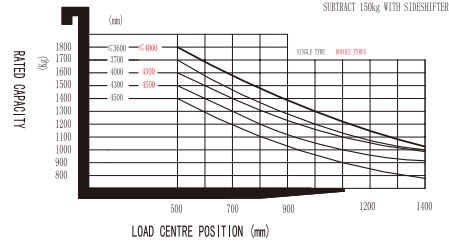


RATED CAPACITIES AND LOAD CENTERS GRAPH

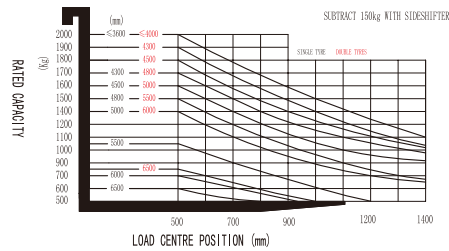


RATED CAPACITIES AND LOAD CENTERS GRAPH

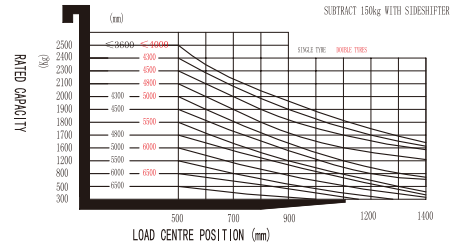

RATED CAPACITIES AND LOAD CENTERS GRAPH

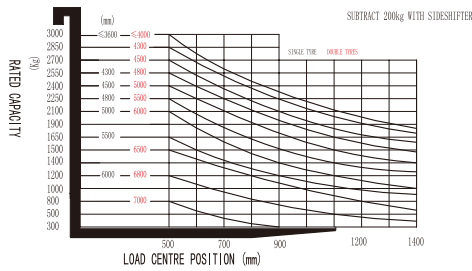

RATED CAPACITIES AND LOAD CENTERS GRAPH

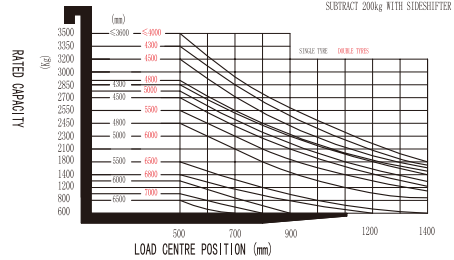

Options	CPC(Q)D15/18T8	CPC(Q)D20/25T8	CPC(Q)D30T8	CPC(Q)D35T8
Other dimension forks	●	●	●	●
fork extension	●	●	●	●
Okamura Transmission	●	●	●	●
LPG system	●	●	●	●
High-mounted exhaust system	●	●	●	●
Middle-mounted exhaust system	●	●	●	●
Dual air cleaners or special air cleaner	●	●	●	●
Solid tyre	●	●	●	●
Non-mark tyre	●	●	●	●
Fork weighing system	●	●	●	●
Special overhead guard height	●	●	●	●
Different lifting height masts	●	●	●	●
PVC shed	●	●	●	●
Side shift	●	●	●	●
Other attachment	●	●	●	●
Cabin	●	●	●	●
Heater	●	●	●	●
Fan	●	●	●	●
Front window with wiper	●	●	●	●
Rear window with wiper	●	●	●	●
Cabin without side doors	●	●	●	●
Fire extinguisher	●	●	●	●
Full suspension seat	●	●	●	●
Dual drive wheels with fender	●	●	●	●
Rear working light	●	●	●	●
OPS system	●	●	●	●
Special carriage and backrest	●	●	●	●

**MAX-8**

